
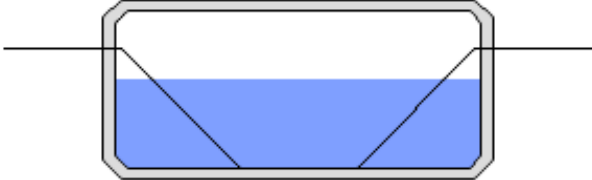



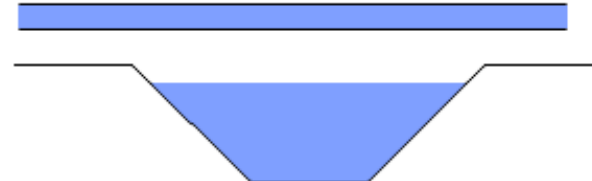
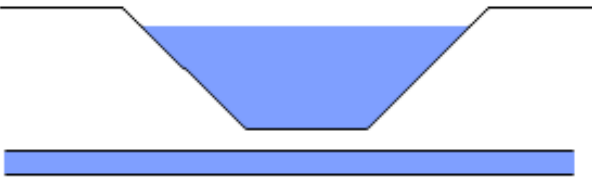

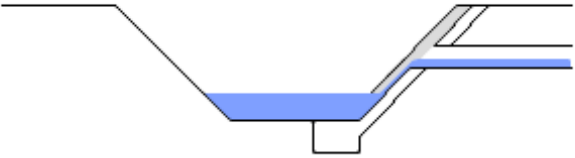


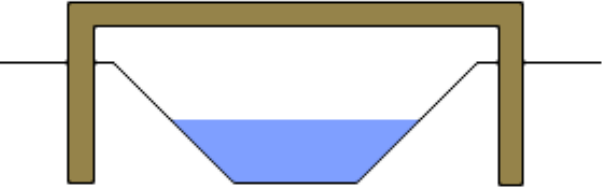
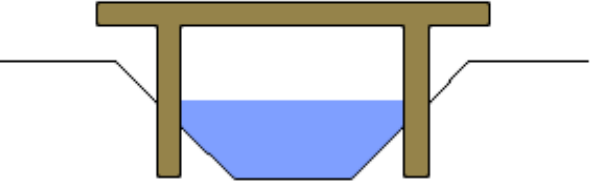
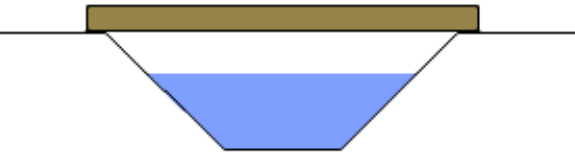
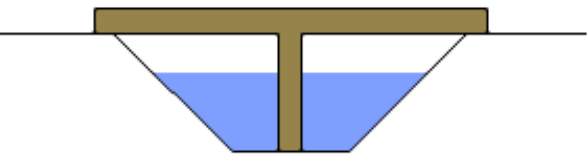


Cross Sections of Consentable Activities

	<p>Pipe Culvert (including extension and removal of)</p> <p>Consent Required under Section 23 (1)(b).</p>
	<p>Oversized Box Culvert (including extension and removal of)</p> <p>Consent Required under Section 23 (1)(b).</p>
	<p>Trash Screens</p> <p>Consent Required as it is an alteration to a culvert and has the potential to obstruct flow under Section 23 (1)(c)</p>
	<p>Bank Protection Works</p> <p>Not Consentable under LDA 91, (Temporary works may require consent).</p>
	<p>Pipe Crossing (in channel)</p> <p>Consent Required under Section 23 1(a) if placed on bed and under Section 23 (1)(b) if above bed</p>
	<p>Pipe Crossing (above bank)</p> <p>Not Consentable under LDA 91 as it does not affect the watercourse.</p>
	<p>Pipe Crossing (below bed)</p> <p>Not Consentable under LDA 91 as it does not affect the watercourse – Potential temporary works consent.</p>
	<p>Protruding Pipe Outfall</p> <p>Not Consentable under LDA 91 as it will not act like a dam/weir or like obstruction.</p>

	<p>Outfall within Bank profile</p> <p>Not Consentable under LDA 91 as it does not act like a mill dam or weir.</p>
	<p>Weir/Dam or impoundment or temporary works that obstruct flow</p> <p>Consent Required under Section 23 1(a)</p>
	<p>Bridge (where soffit level is below bank top level)</p> <p>Consent Required under Section 23 1(b) as it acts like a culvert.</p>
	<p>Bridge (abutments not reducing flow area/width)</p> <p>Not Consentable under LDA 91 as does not interfere with flow.</p>
	<p>Bridge (Abutments restricting flow)</p> <p>Consent Required under Section 23 1(b) as it acts like a culvert</p>
	<p>Clear span bridge</p> <p>Not Consentable as it does not affect the watercourse</p>
	<p>Bridge with support in channel</p> <p>Not Necessarily Consentable under LDA 91 as it may not act like a dam/weir or like obstruction. Need to consider size of pier against size of watercourse, but would want to discourage the use of a pier in the watercourse. Contact SMBC to discuss if consent is required.</p>